


Terrazzo Nero

Code: **TRZ-NER-POL**

Collection: **Terrazzo**

Product Details:

| | |
|------------------------|---------------|
| Material | Terrazzo |
| Color | Black |
| Surface | Polished |
| Mounting Type: | Loose |
| Priced by: | sf |
| Sold by: | box |
| Sheet Size: | 600x600 |
| Chip Size (inch) | 23.62x23.62" |
| Chip Size (mm) | 600x600 |
| Thickness | 1/2" |
| Sheet Coverage (sq.ft) | 3.875 |
| Variation: | V3 (moderate) |
| Porcelain Faces: | - |
| Porcelain Edges: | Rectified |

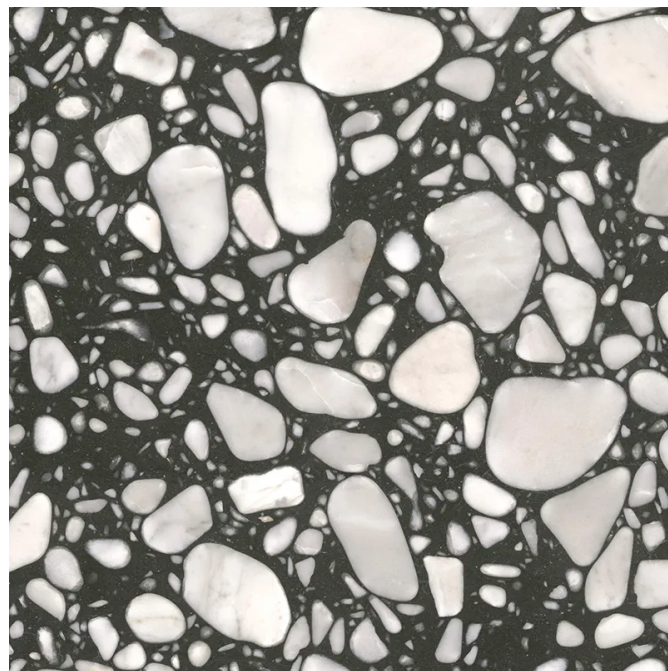

Packaging Info:

| | |
|--------------------------|-----------|
| Packing: | 4 pcs/box |
| Sq. Ft. Per Box: | 15.500 |
| Weight/box: | 98.000 |
| Sheet or Sq. Ft. weight: | 3.875 |



Areas of use

| | |
|------------------------|-----|
| Indoor Walls: | Yes |
| Light traffic floors: | Yes |
| High traffic floors: | Yes |
| Shower Walls: | Yes |
| Shower Floor: | Yes |
| Steam Room: | Yes |
| Swimming Pool: | No |
| Heat areas up to 150F: | Yes |
| Commercial Walls: | Yes |
| Commercial Floors: | Yes |

MIR[®]
Collections

2200 B Zanker Rd,
San Jose, CA 95131
Phone: +1 408 432 1000
Fax: +1 408 228 3924
www.mir-mosaic.com
E-mail: info@mir-mosaic.com

Additional Specs:

Slip resistance: >35 (Dry) / >3 (Wet)

Water absorption: $\leq 0.10\%$

Linear thermal expansion: $21 \times 10^{-6} \text{ } ^\circ\text{C}^{-1}$

Frost Resistance: KMf25 0.3-1.4

Abrasion Resistance: 19.8 cm³/50cm²

Reaction to fire: A2f1-s1

Maintenance and Installation:

Recommended Mortar: Laticrete 254 Platinum

Recommended Grout: Laticrete Permacolor

Grout Joints exterior: 4mm

Grout joint interior: 4mm